

PRIMER U


ADHESION PROMOTION PRIMER FOR NON-ABSORBENT SURFACES



CHARACTERISTICS		ENVIRONMENTAL	METHOD OF USE			PRECAUTIONS
 ALLOWS TO BREATHE	 WATER BASED	 ECO GREEN	 SPRAY APPLICATION	 APPLY BY ROLLER	 APPLY BY BRUSH	 STORAGE: KEEP AWAY FROM FROST

PROBLEM

FOR PROMOTING ADHESION ON NON-ABSORBENT SURFACES BEFORE APPLYING GLUES AND CEMENT MORTARS

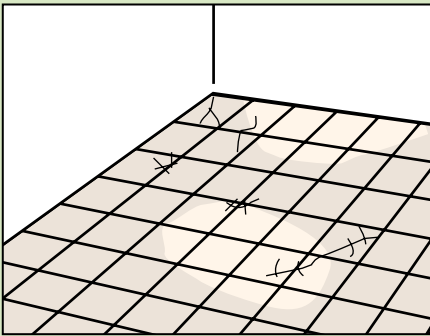

SOLUTION

PRIMER U is a solvent-free special resin-based primer in aqueous emulsion with mineral fillers.

ADVANTAGES

- Promotes adhesion on non-absorbent surfaces.
- Free from solvents.
- Quick drying.

APPLICATION FIELDS

PRIMER U is used specifically as a fixing and adhesion-promotion agent on non-absorbent surfaces. The most common use is in laying tiles overlapping on existing floors, with cement-based adhesives: the preliminary application of **PRIMER U** creates a rough surface which promotes adhesion to the support. It can also be used to consolidate crumbly surfaces and to uniform absorption on mixed materials. It is used as an adhesion promoter on concrete before the application of plaster and cement-based skimming products.


METHOD OF USE

The surfaces to be treated must be dry, clean and free from loose parts. Residues of oil, grease and old layers must be removed.

PRIMER U is ready for use. Dilution with water is not advisable. It is recommended to mix the product well before use.

Apply with a brush or roller.

Once **PRIMER U** is dry, the cement-based product can be applied, within 48 hours of applying the primer.

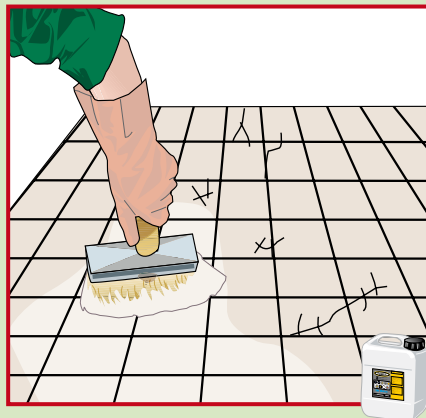

COVERAGE

Average consumption is between 100 and 200 g/m² according to the porosity of the support.

PRECAUTIONS

- Keep the containers hermetically closed until used.
- Apply in a temperature range from +5° to +30°C.
- The product is susceptible to frost - store at temperatures of above +5°C.
- Do not dispose of the product or the empty containers in the environment.
- Tools must be cleaned with water if the product is still fresh and with alcohol or thinner if the film has dried.

TECHNICAL CHARACTERISTICS

	PRIMER U
Aspect	colourless liquid
Specific weight (UNI EN ISO 2811-1)	1.05±0.05 kg/litre
Solid content (UNI EN ISO 3251)	43±2%
pH	7-8
Dry-to-touch time (23°C - R.H. 65%)	2-4 hours
Flammability	non-flammable
Shelf life in original packaging	24 months

ing the numerous possible uses and the possible interference of conditions or elements beyond our control, we assume no responsibility regarding the results which are obtained. The purchasers, of their own accord and under their own responsibility, must establish the suitability of the product for the envisaged use.

The figures shown are average indicative figures relevant to current production and may be changed or updated by INDEX S.p.A. at any time without previous warning. The advice and technical information provided, is what results from our best knowledge regarding the properties and the use of the product. Consider

SAFETY REGULATIONS

- Not harmful.
- Do not swallow.

PACKAGING

PRIMER U
5-liter Can

• FOR ANY FURTHER INFORMATION OR ADVICE ON PARTICULAR APPLICATIONS, CONTACT OUR TECHNICAL OFFICE • IN ORDER TO CORRECTLY USE OUR PRODUCTS, REFER TO INDEX TECHNICAL SPECIFICATIONS •

index
Construction Systems and Products

Internet: www.indexspa.it
For technical and commercial information: tecom@indexspa.it
Accounting department: index@indexspa.it
Export department: index.export@indexspa.it

Via G. Rossini, 22 - 37060 Castel D'Azzano (VR) - Italy - C.P.67 - Tel. (+39)045.8546201 - Fax (+39)045.518390

